

## iDS-7200HQHI-K2/4S SERIES TURBO ACUSENSE DVR



### Features and Functions

#### VCA Detection

- Deep learning-based analysis: re-recognition of the human body or vehicle target in behavior detection to filter false alarm, supports 4-ch detection

#### Video Input and Transmission

- Self-adaptive HDTV/HD/SD/Analog/CVBS signal input
- When enhanced IP mode enabled, up to 12-ch 6 MP IP cameras input for iDS-7208HQHI-K2/4S; 24-ch 6 MP IP cameras input for iDS-7216HQHI-K2/4S
- Long distance transmission over UTP and coaxial cable: max. 800m for 1080p and 1200m for 720p HDTV signal

#### Compression and Recording

- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras
- H.265 Pro+/H.265 Pro can be enabled to improve encoding efficiency and reduce data storage costs
- Full channel recording at up to 4 MP lite resolution
- Supports real-time 1080p lite and when enabled, the image effect is similar with 1080p

#### Video Output

- Simultaneous HDMI/VGA output
- Separate CVBS output

#### Storage and Playback

- 2 SATA interfaces (up to 10 TB capacity per HDD)
- 8/16-ch synchronous playback
- Smart search for efficient playback
- Supports the 3<sup>rd</sup> party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

#### Smart Function

- Supports multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- iDS-7216HQHI-K2/4S supports 1-ch sudden scene change detection


#### Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M Ethernet network interface for iDS-7208HQHI-K2/4S, and 1 RJ45 10M/100M/1000M Ethernet network interface for iDS-7216HQHI-K2/4S
- Output bandwidth limit configurable, up to 96M for iDS-7208HQHI-K2/4S and 128M for iDS-7216HQHI-K2/4S

## Specifications

Model	iDS-7208HQHI-K2/4S	iDS-7216HQHI-K2/4S	
Video/Audio input	<b>Video compression</b>	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	
	<b>Analog video input</b>	8-ch	16-ch
		BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection	
	<b>HDTVI input</b>	4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 <b>Note:</b> The 3 MP signal input is only available for channel 1/2 of iDS-7208HQHI-K2/4S, and for channel 1/2/3/4 of iDS-7216HQHI-K2/4S.	
	<b>AHD input</b>	4 MP, 1080p25, 1080p30, 720p25, 720p30	
	<b>HDCVI input</b>	1080p25, 1080p30, 720p25, 720p30	
	<b>CVBS input</b>	PAL/NTSC	
	<b>IP video input</b>	Up to 12-ch	Up to 24-ch
		Up to 6 MP resolution Supports H.265+/H.265/H.264+/H.264 IP cameras	
	<b>Audio compression</b>	G.711u	
<b>Audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)		
Video/Audio output	<b>CVBS output</b>	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
	<b>HDMI/VGA output</b>	1-ch, HDMI, 1-ch, VGA, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA Simultaneous Output	
	<b>Encoding resolution@ Frame rate</b>	Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N)	
		Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N)	
	<b>Video bit rate</b>	32 Kbps to 6 Mbps	
	<b>Audio output</b>	1-ch, RCA (Linear, 1 KΩ)	
	<b>Audio bit rate</b>	64 Kbps	
	<b>Dual stream</b>	Support	
	<b>Stream type</b>	Video, Video & Audio	
	<b>Synchronous playback</b>	8-ch	16-ch
Network management	<b>Remote connections</b>	64	128
	<b>Network protocols</b>	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF	
Hard disk	<b>SATA</b>	2 SATA interfaces	
	<b>Capacity</b>	Up to 10 TB capacity for each disk	
External interface	<b>Two-way audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1 <sup>st</sup> audio input)	
	<b>Network interface</b>	1, RJ45 10M/100M self-adaptive Ethernet interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface
	<b>USB interface</b>	2 × USB 2.0	
	<b>Serial interface</b>	RS-485 (half-duplex)	
General	<b>Power supply</b>	12 VDC	
	<b>Consumption (without HDD)</b>	≤ 18 W	≤ 25 W
	<b>Working temperature</b>	-10 °C to +55 °C (+14 °F to +131 °F)	
	<b>Working humidity</b>	10% to 90%	
	<b>Dimensions (W × D × H)</b>	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)	
<b>Weight (without HDD)</b>	≤ 1.78 kg (3.9 lb)	≤ 2 kg (4.4 lb)	

## Physical Interfaces

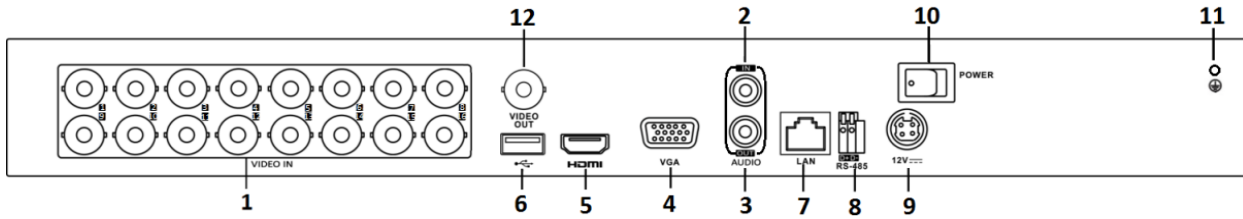

**NOTE** The rear panel of iDS-7208HQHI-K2/4S provides 8 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	7	LAN Network Interface
2	AUDIO IN, RCA Connector	8	RS-485 Serial Interface
3	AUDIO OUT, RCA Connector	9	12 VDC Power Input
4	VGA Interface	10	Power Switch
5	HDMI Interface	11	GND
6	USB Interface	12	VIDEO OUT

## Available Models

iDS-7208HQHI-K2/4S, iDS-7216HQHI-K2/4S